


KELTRIPLE



KELANI CABLES PLC

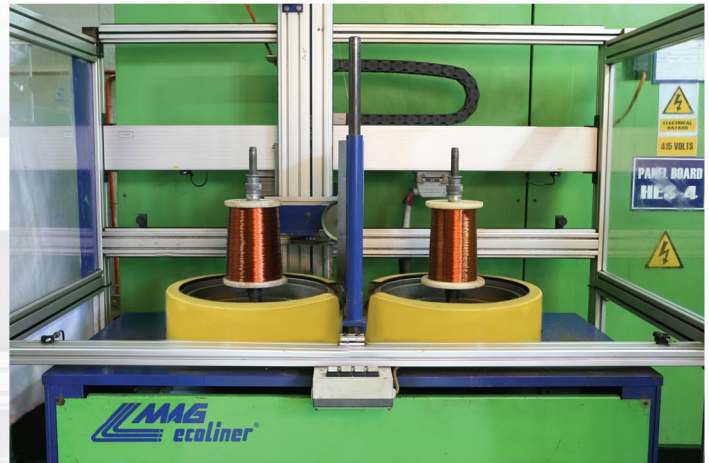

| PROPERTIES | |
|-------------------------|---------------------------------------------------------------------|
| STANDARDS | IEC 60317- 13 |
| INSULATION COATINGS | POLYESTERIMIDE OVERCOATED WITH POLYAMIDE - IMIDE Plus BONDING LAYER |
| AVAILABILITY | 0.212 - 0.800 mm |
| MECHANICAL PROPERTIES | FOR 0.5 mm |
| ELONGATION | > 25% |
| SPRINGINESS | < 47 |
| ADHERENCE - FLEXIBILITY | EXCELLENT |
| RESISTANCE TO ABRASION | >7.5N |
| ELECTRICAL PROPERTIES | |
| BREAKDOWN VOLTAGE | >4.6kv |
| THERMAL PROPERTIES | |
| TEMPERATURE INDEX | 200 °C |
| CUT THROUGH | 2min at 320 °C |
| HEAT SHOCK | 2d, 1/2h 220 °C |
| CHEMICAL PROPERTIES | |
| SOLVENT TEST | 5H |

